

Fig. 2

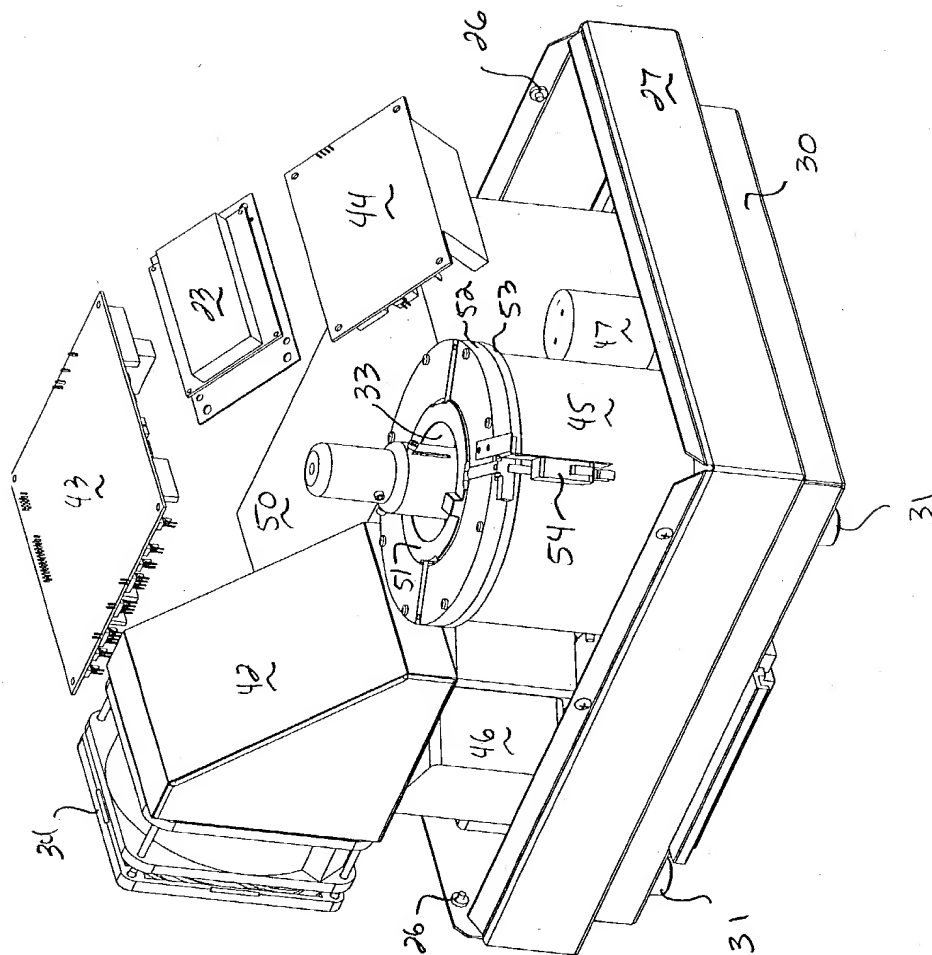
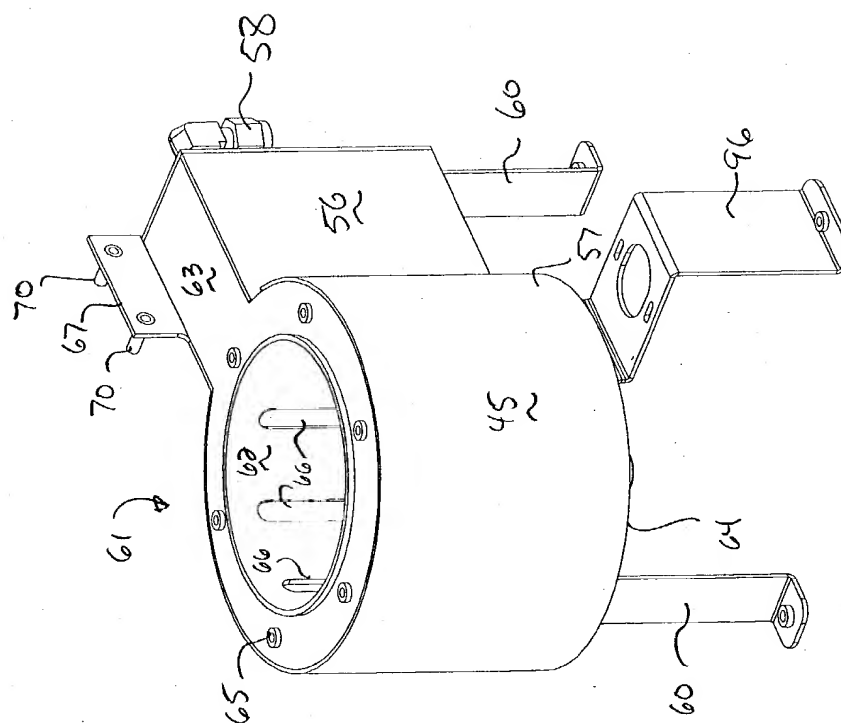
[illegible]

Fig. 4



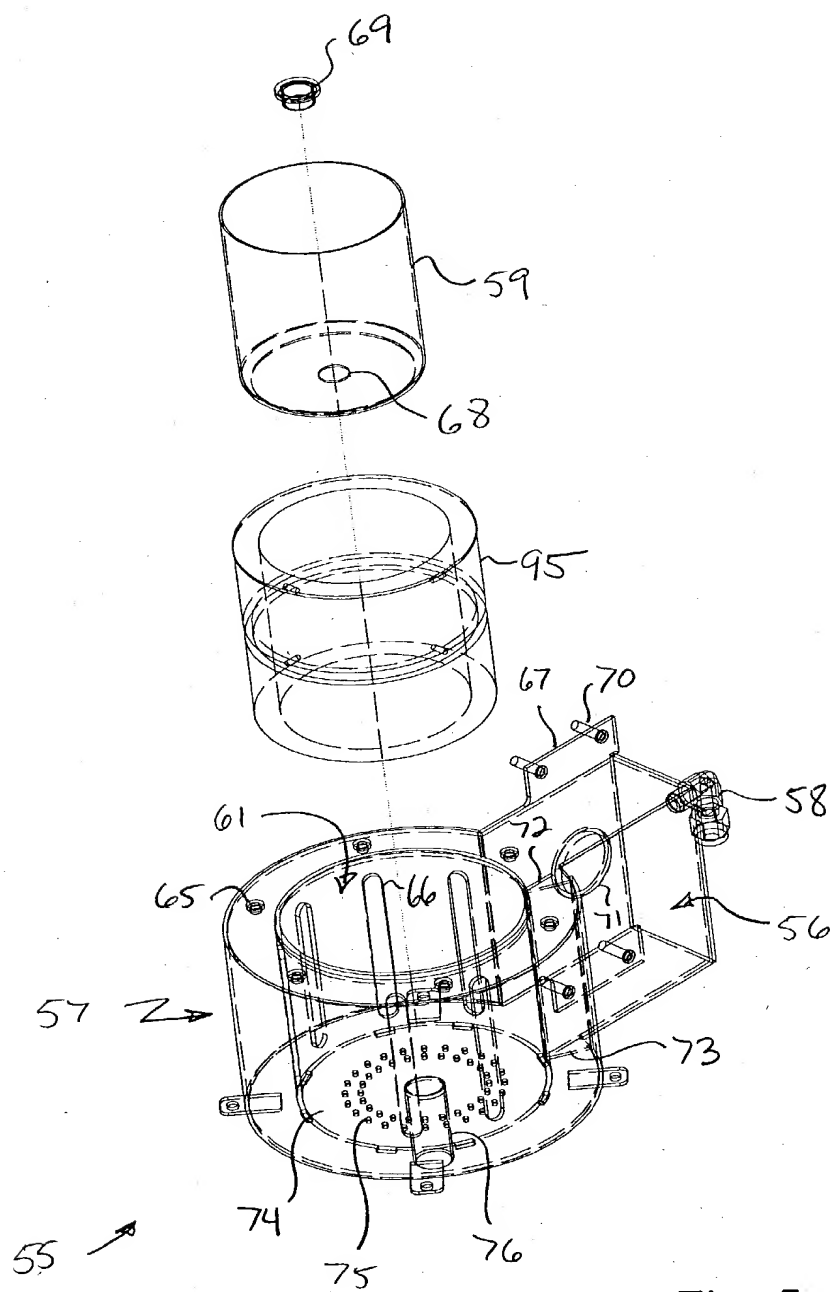



Fig. 5



\_\_\_\_\_

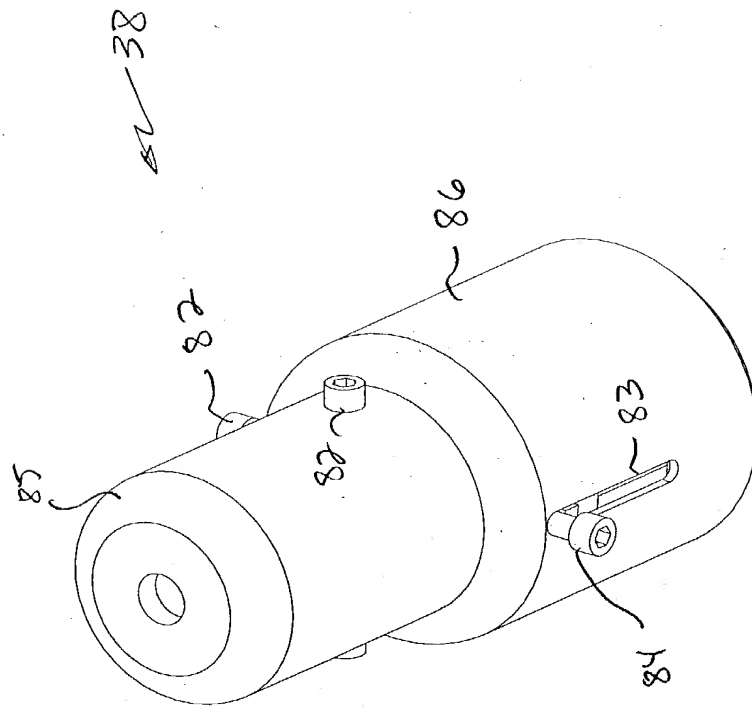
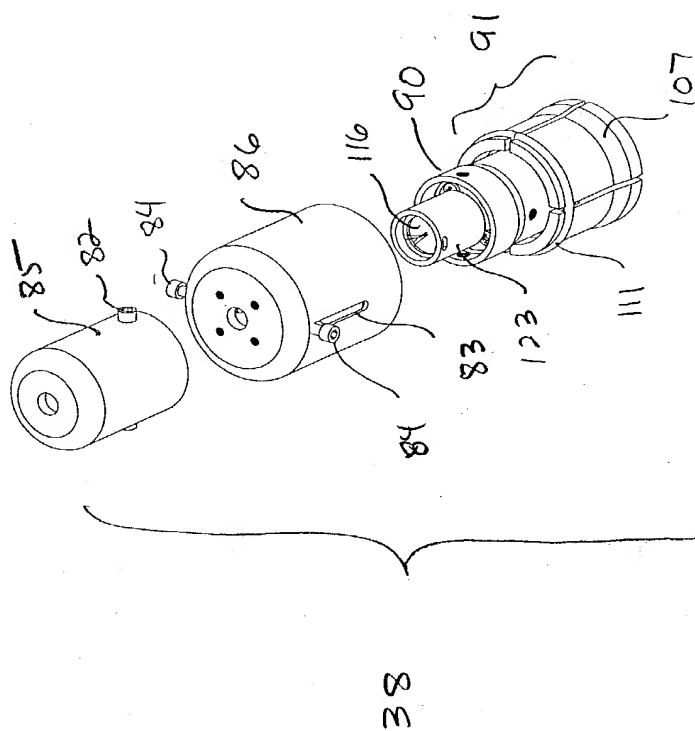


Fig. 8





38

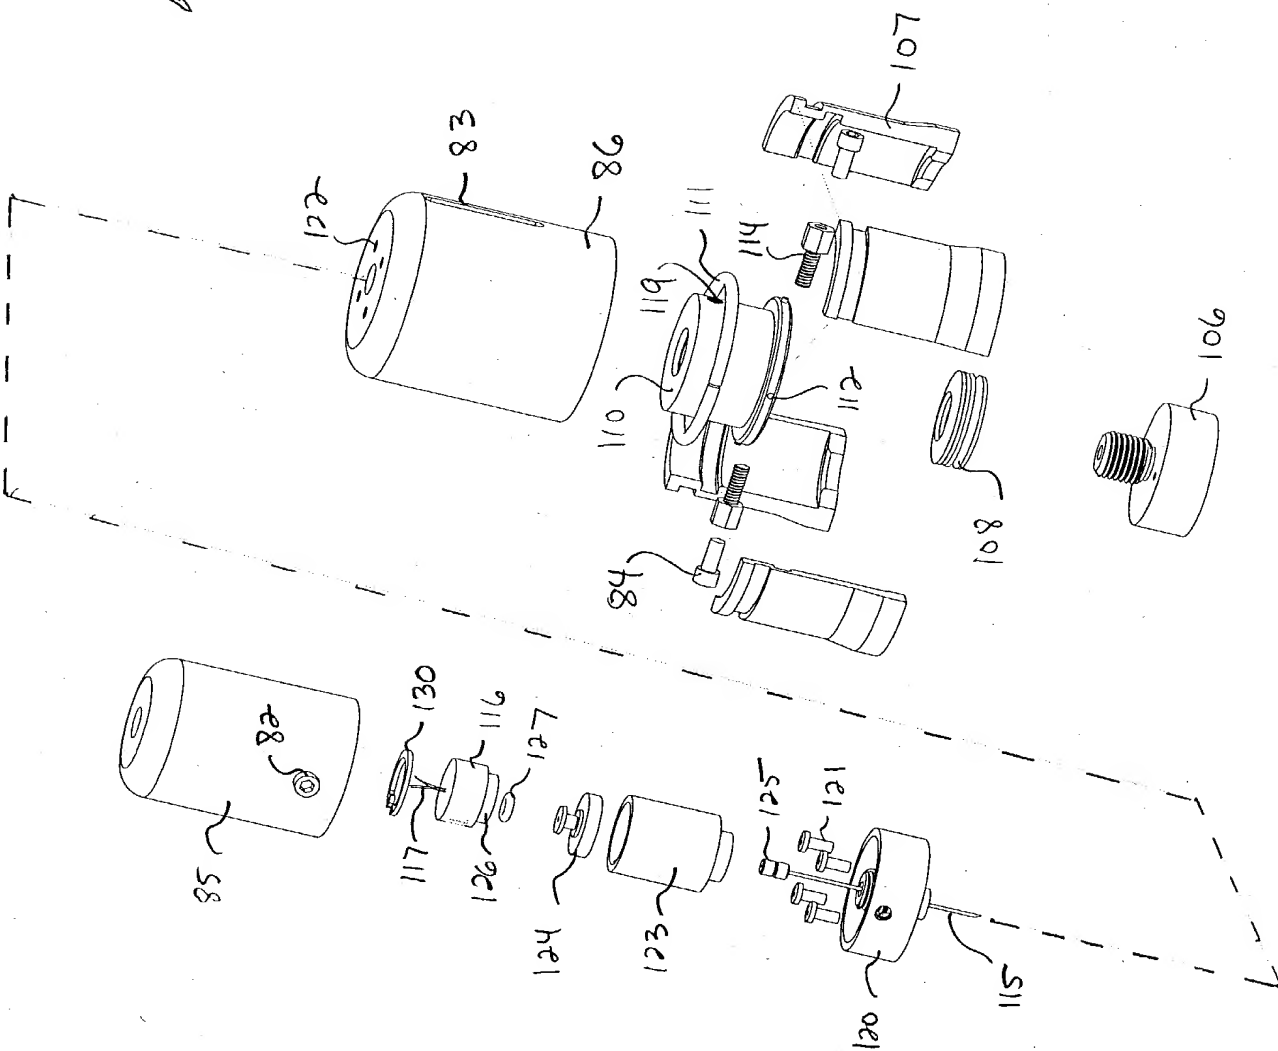
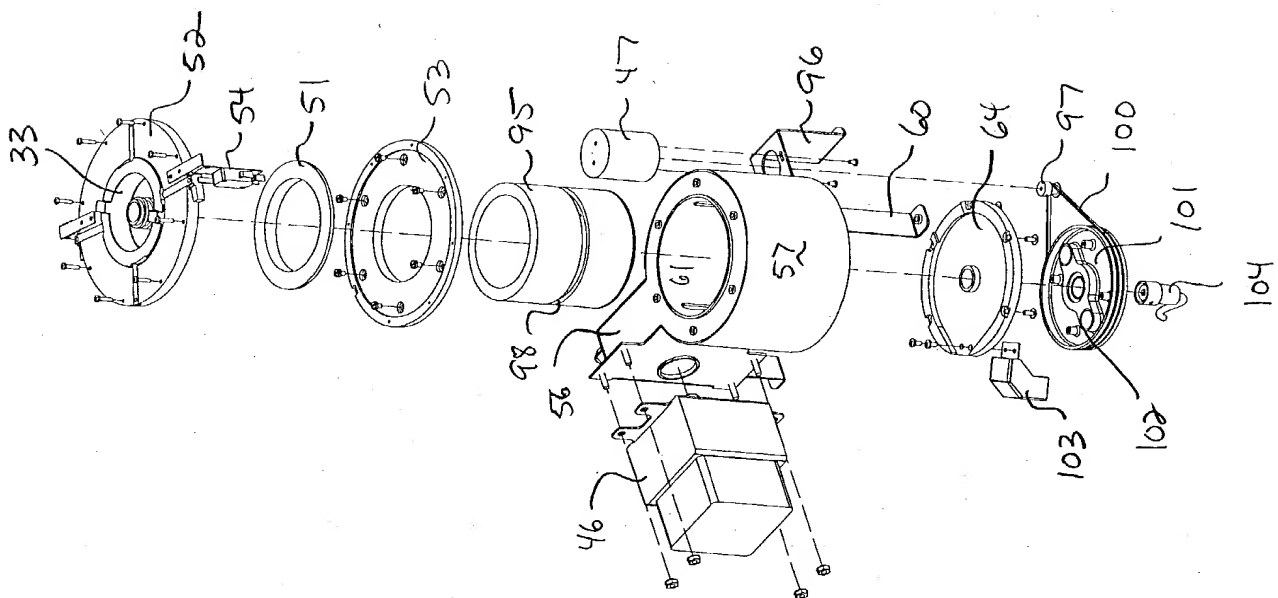


Fig. 9



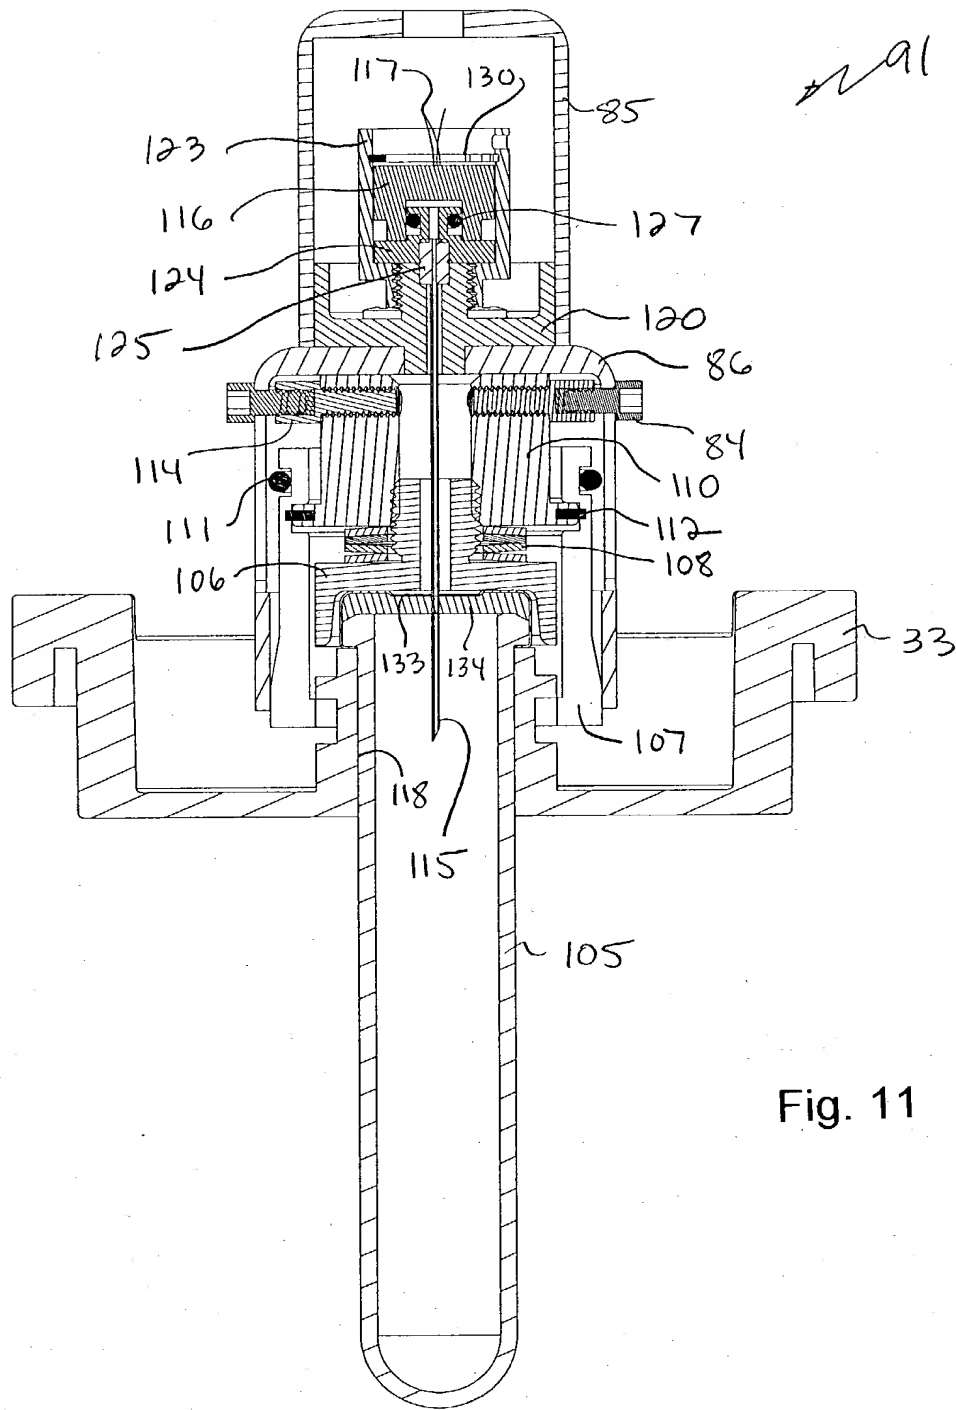


Fig. 11





FIG. 14 is a perspective view of the probe 105 in a retracted position. The probe 105 includes a handle 133 and a shaft 137. The handle 133 is connected to the shaft 137. The shaft 137 is shown in a retracted position, with the distal end 136 of the shaft 137 being retracted into the handle 133. The distal end 136 of the shaft 137 is shown in a dashed line, indicating it is hidden from view by the handle 133.

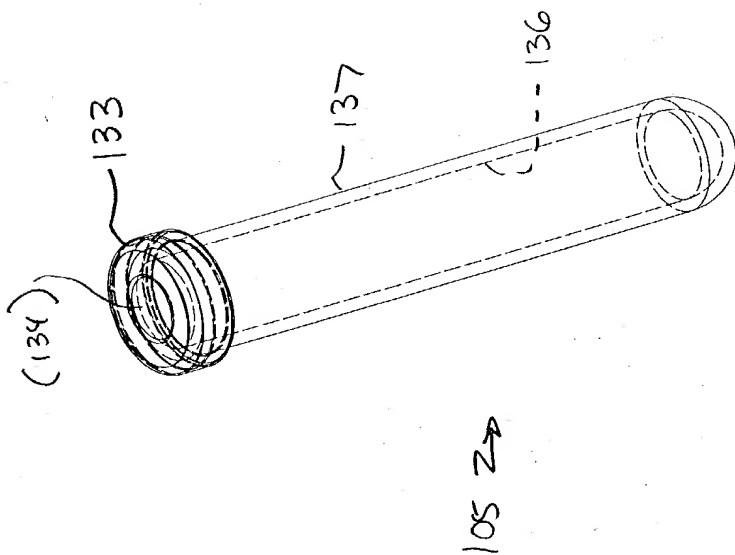


Fig. 14

FIG. 15 is a perspective view of the device 100 in a closed position. The device 100 includes a handle 136 and a body 137. The handle 136 is connected to the body 137 by a hinge 135. The hinge 135 includes a pin 140 and a bush 141. The pin 140 is secured by a nut 142.

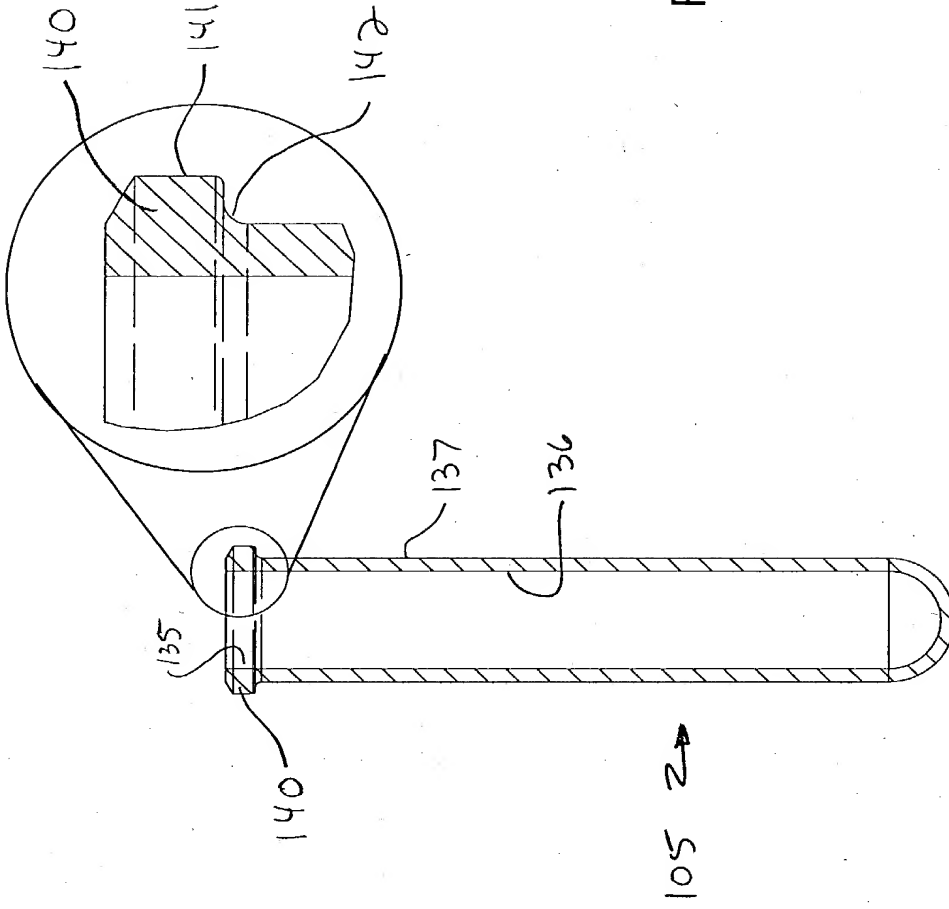


Fig. 15